

DAYOU DSW2624G

L2 Gigabit Ethernet Switch



Overview

DAYOUNETWORKS DSW2624G is L2 Gigabit Ethernet Switch as the interface of the high-end, high-quality multimedia services.

DSW2624G Gigabit 24port (10/100/1000Base-Tx) uplink options, depending on your environment, and apply the G-PON Ethernet environments, and can be applied to the environment. Each uplink G-PON (ONU), 1000Base-X, 1000Base-TX, flexibly, so that you can use to build a variety of network can be configured in a network environment is a system that provides reliable and superior performance.



DSW2624G

Network systems management

SNMP v1/v2, MIB II, RMON MIB, and applied to the remote network management can be more easily.

Improved performance

Non-blocking Switching fabric for high-performance stable and 56Gbps switching capacity and up to speed packet processing 41.6Mpps support.

High Performance Network

DSW2624G as a high-performance network services supported by the Switch's Ethernet-based data, video, and voice services for optimal network environment.

Key Features

L2 Features

- Port-based VLAN, IEEE 802.1q Tagged VLAN
- VLAN Trunk
- VLAN stacking (Q-in-Q). VLAN Translation
- 802.1p packet priority
- Spanning Tree Protocol(STP/RSTP/MSTP)
- 802.3ad Link Aggregation Control Protocol
- Static Trunk group
- Jumbo frame 9KB
- Self loop detection

Multicast

- IGMP v1/v2
- IGMP snooping/IGMP static join/IGMP Join Limit
- Multicast Packet Filtering

QoS

- Classification
 - L2 : SRC/DST MAC, Ether type, 802.1p priority, VLAN ID
 - L3 : SRC/DST IP, ToS, DSCP, IP Precedence
 - L4 : SRC/DST TCP/UDP port, ICMP
- Mark/remark/policing
- Queue scheduling (SPQ, WRR,DRR)
- 8 queues per port
- Congestion management (RED)
- Traffic policing and shaping
- Rate limiting
- Traffic Control

Security

- MAC flood Guard/Port Flood Guard
- MAC Filtering/MAC limit
- Storm control (broadcast, multicast, DLF)
- CPU Protection (ACL, Rate Limit)
- DoS Protection
- NetBIOS, NetBEUI, NBT, CIFS, SSDP, WSDD filtering
- ARP/DHCP snooping , ARP Inspection
- 801.x Port-Based Authentication
- Port isolation

Management

- CLI(serial / Telnet)
- Dual OS (active/backup) & Fail Over
- Remote OS upgrade (FTP/ TFTP)
- Multiple configuration files
- Remote configuration upgrade (FTP/TFTP)
- Port/Protocol mirroring
- SNMP v1/v2
- RMON history
- Syslog
- Telnet/SSH
- DHCP server, relay agent with option82
- DDM (Digital Diagnostics Monitoring)
- LLDP (Link layer Discovery Protocol)
- AAA (Authentication, Authorization, and Accounting)
- NTP
- TCP dump & logging

DAYOU NETWORKS SWITCH SERIES

Specifications

Memory

- RAM 128Mbyte
- FLASH 128Mbyte

Performance

- 56Gbps Switching fabric, 41.6Mpps Throughput
- 16K MAC address, 4K 802.1Q VLAN
- 4K Active VALN
- 1K Multicast group entry

Power

- Operating Power AC88V~264/ VAC47~63Hz
Free Voltage
- Power Consumption 34.5Watts
- Operating Temperature -20°C ~60°C(-4 °F ~ 140 °F)
- Operating Humidity 10 ~ 90%(Non-condensing)

Dimensions




- Dimension(W/H/D) 440mm x 45mm x 250mm
- Weight 3.1Kg


Warranty

- One-year(12month) return to factory parts

Interface

- Downlink 24 ports 10/100/1000Base-Tx
- Uplink(option) 2 ports 10/100/1000Base-Tx,
1000Base-X, G-PON
- Console RS-232C, RJ-45

Module	Type	Spec(Up link)	Part No.
	GPM	G-PON	
	GFM	1000Base-X	
	GEM	10/100/1000Base-Tx	

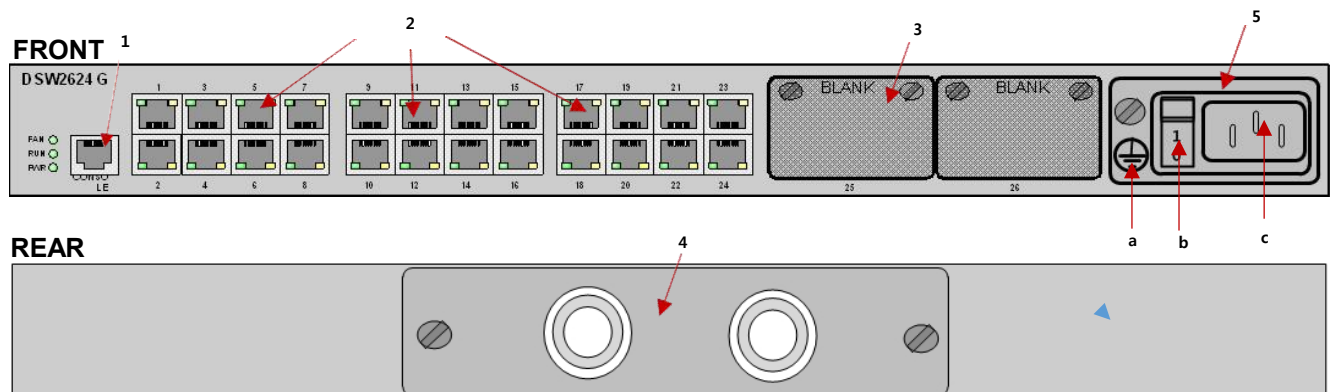

1. RJ45 port of Console
2. 10/100/1000Base-T
3. 10/100/1000Base-TX , 1000Base-X, GPON (UP LINK CARD)
4. Fan module

5. PSU Module
 - a : Earth Terminal
 - b : Power Switch
 - c : Electrical Power Input : AC Power 110 VAC ~ 220VAC Free Voltage

Ordering Information

Option (Up link module)

- **GPM:** G-PON
- **GFM:** 1000Base-X
- **GEM:** 10/100/1000Base-Tx

Contact Information

Website: <http://www.dayounetworks.co.kr>
E-mail : sales@dayounetworks.co.kr

DAYOU NETWORKS

4F, 500-2, Sangdaewon-dong, Junwon-gu, Seognam-si,
Gyeonggi-do, Korea (462-120)
Tel : +82 -31 737-7125 / FAX:+82-31-737-7100